



# DOGO Side

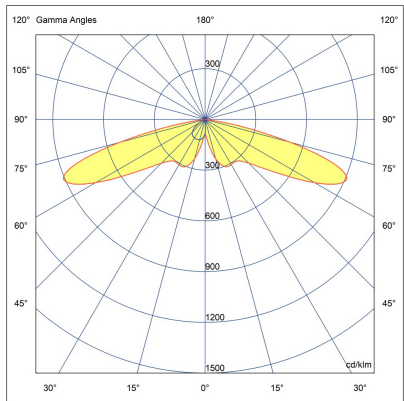

LW6048.585-US-SLSW-700-822-ONOFF

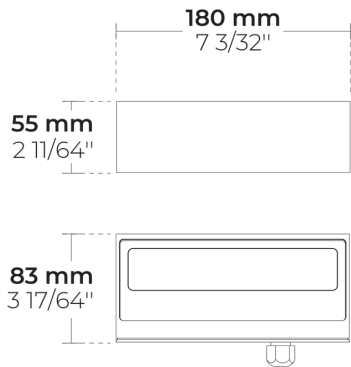

[SLSW]

Special linear, Side throw

## Configuration

|                       |                |
|-----------------------|----------------|
| Light distribution    | [SLSW] 154x55° |
| Delivered lumens flux | 803 lm         |
| Rated input power     | 10 W           |
| Color temperature     | 2200 K CRI 80  |
| Luminaire efficacy    | 80 lm/W        |
| Lamp                  | 2 LED          |
| BUG rating            | B1-U0-G1       |
| Lifetime L90 (hour)   | >42,000        |
| Lifetime L80 (hour)   | >42,000        |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Surface or wall mountable   |
| Housing                 | Corrosion resistant, marine grade aluminum housing                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP65  |
| Input voltage           | 120-277V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 2.5 lbs   |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 3/3 kV  |
| Power factor            | > 0.90  |
| Through wiring          | Single power cord entry   |
| Operating temperature   | -40...50°C  |
| Power cord              | 8" of flexible power cord   |
| Packing box dimensions  | 4 21/64" * 7 7/8" * 2 3/4"  |

## Accessories (To be ordered separately)

---








### Mounting accessories



**DALI driver within  
an IP67 box for  
DOGO**

007502840

|   |  |  |      |  |      |  |          |  |
|---|--|--|------|--|------|--|----------|--|
| Project name                              |  |  |      |  | Type |  | Quantity |  |
| Date                                      |  |  | Note |  |      |  |          |  |
| LW6048.585-US-SLSW-700-822-ONOFF-__-__-__ |  |  |      |  |      |  |          |  |

| Light distribution                                       | Rated input power                                      | Color temperature  | Control           | Product colors   |
|--|--|--|-------------------|--|
| [SLSW]<br>Special linear, Side throw - 154x55°           | [700]<br>10 W  | [822]<br>2200 K CRI 80   | [ONOFF]<br>On/Off | [HM1]<br>Black    |
|  | [350]<br>5 W   | [827]<br>2700 K CRI 80<br><br>[830]<br>3000 K CRI 80<br><br>[840]<br>4000 K CRI 80 |                   | [HM2]<br>Dark gray <br><br>[HM3]<br>Anthracite gray <br><br>[HM4]<br>Light gray <br><br>[HM5]<br>White <br><br>[HM6]<br>Bronze <br><br>[CC] <br>Custom color (Please specify RAL code) |
| Extras   | Accessories ( <i>To be ordered separately</i> )        |  |                   |  |
| Mounting options   | Mounting accessories                                   |  |                   |  |
| [ESMA]<br>Extra surface mounting adaptor for a flat wall | [007502840]<br>DALI driver within an IP67 box for DOGO |  |                   |  |
| Luminaire body options                                   |  |  |                   |  |
| [DPC]<br>Double powder coating                           |  |  |                   |  |