



WINGS AFX 4 Module

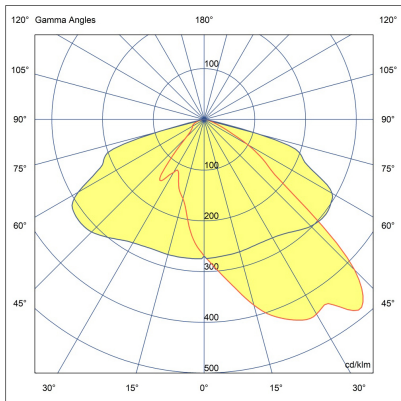

LL2012.864-US-T2-2-700-830-ONOFF

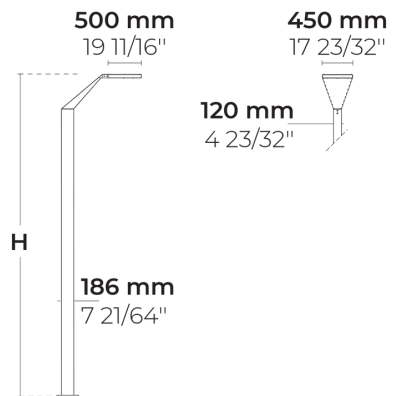

[T2]
Type II

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [T2] 149x54° |
| Delivered lumens flux | 14585 lm |
| Rated input power | 135 W |
| Color temperature | 3000 K CRI 80 |
| Luminaire efficacy | 106 lm/W |
| Lamp | 64 LED |
| Color Deviation | 3 SDCM |
| BUG rating | B3-U1-G2 |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|------------------------|---|
| Mounting | Surface mountable |
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 140.88 lbs (16.5'), 157.67 lbs (20') |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |
| Packing box dimensions | 17 23/32"*3 5/32"*22 53/64" |
| Pole detail | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |

Poles (Included)

Product specific poles with base plate



| Configuration code | Height | Diameter / Dimensions | Spigot / End diameter |
|--------------------|--------|--------------------------|--------------------------|
| PAFD.R01.T002-H5 | 16.4' | 7.3x4.7" | |
| PAFD.R01.T002-H6 | 19.7' | 7.3x4.7" | |

| | | | | | | | |
|--------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |

LL2012.864-US-T2-2-700-830-ONOFF-__-__-__

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|--|---|---|--|
| <div> <div>[T2]</div> <div>Type II - 149x54°</div> </div> <div> <div>[P4]</div> <div>Pedestrian crosswalk distribution - 20x78°</div> </div> <div> <div>[T1]</div> <div>Type I - 111x48°</div> </div> <div> <div>[T2]</div> <div>Type II - 133x48°</div> </div> <div> <div>[T3]</div> <div>Type III - 143x63°</div> </div> <div> <div>[T4]</div> <div>Type IV - 117x64°</div> </div> <div> <div>[T5]</div> <div>Type V - 117°</div> </div> | <div> <div>[700]</div> <div>135 W</div> </div> <div> <div>[500]</div> <div>97 W</div> </div> <div> <div>[350]</div> <div>68 W</div> </div> | <div> <div>[830]</div> <div>3000 K CRI 80</div> </div> <div> <div>[827]</div> <div>2700 K CRI 80</div> </div> <div> <div>[740]</div> <div>4000 K CRI 70</div> </div> <div> <div>[840]</div> <div>4000 K CRI 80</div> </div> | <div> <div>[ONOFF]</div> <div>On/Off</div> </div> | <div> <div>[HM1]</div> <div>Black</div> <div></div> </div> <div> <div>[HM2]</div> <div>Dark gray</div> <div></div> </div> <div> <div>[HM3]</div> <div>Anthracite gray</div> <div></div> </div> <div> <div>[HM4]</div> <div>Light gray</div> <div></div> </div> <div> <div>[HM5]</div> <div>White</div> <div></div> </div> <div> <div>[HM6]</div> <div>Bronze</div> <div></div> </div> <div> <div>[CC]</div> <div>Custom color (Please specify RAL code)</div> <div></div> </div> |
| Height | Extras | | | |
| <div> <div>[H5]</div> <div>16.4'</div> </div> <div> <div>[H6]</div> <div>19.7'</div> </div> <div> <div>[HC]</div> </div> | <div> <div>Luminaire body options</div> </div> <div> <div>[DPC]</div> <div>Double powder coating</div> </div> | | | |