

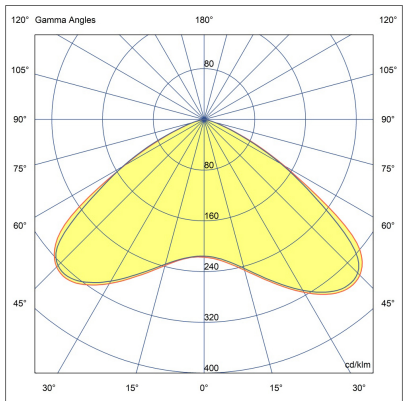


C-LIGHT AFX 4 Module

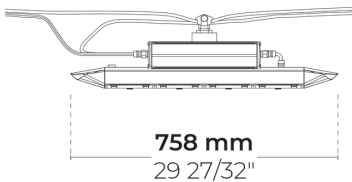

LC2029.864-EN-T5-700-827

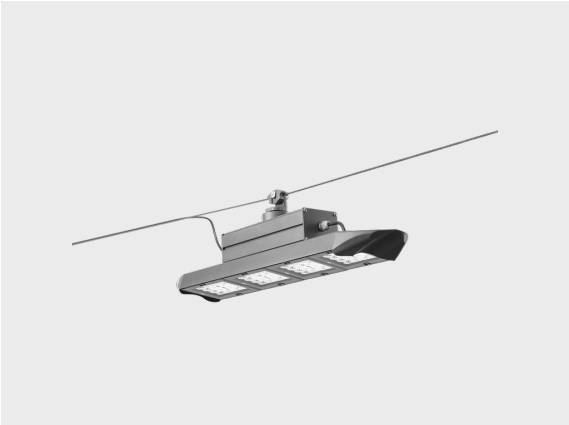

[T5]

Type V

HEPER USA LLC
W227 N546 Westmound Drive Waukesha, 53186
Wisconsin, United States
+1 312 910 9740
infoUS@hepergroup.com

Configuration

Light distribution	[T5] 117°
Delivered lumens flux	15290 lm
Rated input power	135 W
Color temperature	2700 K CRI 80
Luminaire efficacy	109 lm/W
Lamp	64 LED
Color Deviation	3 SDCM
BUG rating	B4-U0-G1
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Technical information

Mounting	Catenary wire mounting
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	8.8 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Packing box dimensions	80*20*25 cm
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name				Type		Quantity	
Date		Note					
LC2029.864-EN-T5-700-827-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[T5] Type V - 117°	[700] 135 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM3]  Anthracite gray
	[500] 97 W	[830] 3000 K CRI 80	[DALI] DALI	[HM4]  Light gray
	[350] 68 W	[740] 4000 K CRI 70		[CC]  Custom color (Please specify RAL code)
		[840] 4000 K CRI 80		
Extras				
Consult the factory				
[C2] Class II				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				