

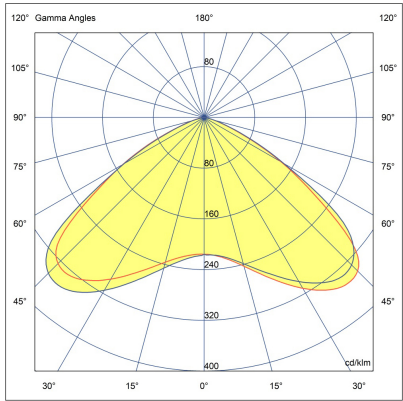


# C-LIGHT AFX 4 Module

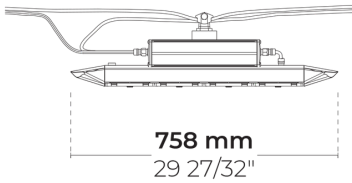

LC2029.864-US-T5-500-827

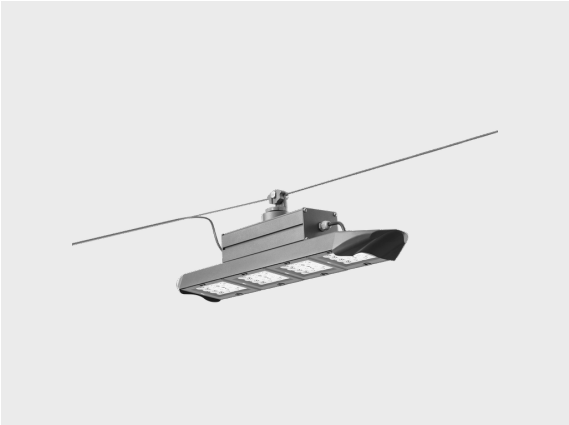

[T5]  
Type V

## Configuration




|                       |               |
|-----------------------|---------------|
| Light distribution    | [T5] 117°     |
| Delivered lumens flux | 11815 lm      |
| Rated input power     | 97 W          |
| Color temperature     | 2700 K CRI 80 |
| Luminaire efficacy    | 118 lm/W      |
| Lamp                  | 64 LED        |
| Color Deviation       | 3 SDCM        |
| BUG rating            | B3-U0-G1      |
| Lifetime L90 (hour)   | >102,000      |
| Lifetime L80 (hour)   | >102,000      |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Catenary wire mounting  |
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | PMMA lens with high optical efficiency                                    |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP66  |
| Input voltage           | 120-277V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 19.36 lbs   |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 10/6 kV   |
| Power factor            | > 0.95  |
| Through wiring          | Single power cord entry   |
| Operating temperature   | -40...50°C  |
| Power cord              | 20" of outdoor use rated flexible power cord                              |
| Packing box dimensions  | 31 1/2" * 7 7/8" * 9 27/32"   |

|                                   |  |      |  |      |  |          |  |
|-----------------------------------|--|------|--|------|--|----------|--|
| Project name                      |  |      |  | Type |  | Quantity |  |
| Date                              |  | Note |  |      |  |          |  |
| LC2029.864-US-T5-500-827-__-__-__ |  |      |  |      |  |          |  |

| Light distribution                    | Rated input power     | Color temperature             | Control                  | Product colors  |
|---------------------------------------|-----------------------|-------------------------------|--------------------------|---|
| <b>[T5]</b><br>Type V - 117°          | <b>[500]</b><br>97 W  | <b>[827]</b><br>2700 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM3]</b> <br>Anthracite gray                       |
|                                       | <b>[700]</b><br>135 W | <b>[830]</b><br>3000 K CRI 80 | <b>[0-10V]</b><br>0-10V  | <b>[HM4]</b> <br>Light gray                            |
|                                       | <b>[350]</b><br>68 W  | <b>[740]</b><br>4000 K CRI 70 |                          | <b>[CC]</b> <br>Custom color (Please specify RAL code) |
| <b>[840]</b><br>4000 K CRI 80         |                       |                               |                          |   |
| <b>Extras</b>                         |                       |                               |                          |   |
| <b>Luminaire body options</b>         |                       |                               |                          |   |
| <b>[DPC]</b><br>Double powder coating |                       |                               |                          |   |