



PUNTO L

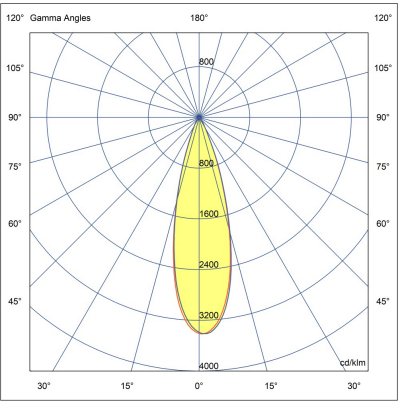

LF8019.698-EN-N-700-740

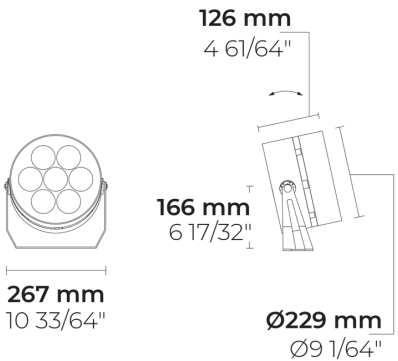

[N]
Narrow - NEMA Type 2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	7060 lm
Rated input power	60 W
Color temperature	4000 K CRI 70
Luminaire efficacy	121 lm/W
Lamp	7 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


Options

Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.03 m ²
Weight	6.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	8/6 kV
Power factor	> 0.98
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

Optical accessories



Snoot for PUNTO L

007502177

Mounting accessories



Spike

160405040

Project name				Type		Quantity	
Date		Note					

LF8019.698-EN-N-700-740-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 26°	[700] 60 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
[S] Spot - NEMA Type 0 - 7°		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark gray
[MN] Medium narrow - NEMA Type 3 - 42°		[830] 3000 K CRI 80		[HM3] Anthracite gray
[M] Medium - NEMA Type 4 - 60°		[840] 4000 K CRI 80		[HM4] Light gray
				[HM5] White
				[HM6] Bronze
				[CC] Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[007502177] Snoot for PUNTO L			
Luminaire body options	Mounting accessories			
[DPC] Double powder coating	[160405040] Spike			