

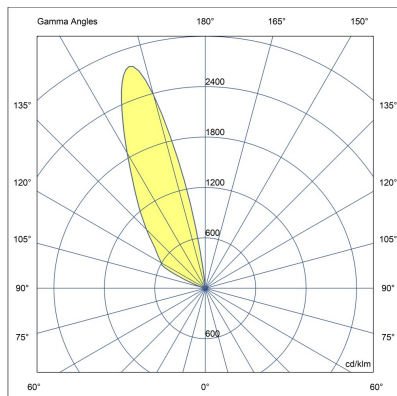


# ZETA 12 Dyno

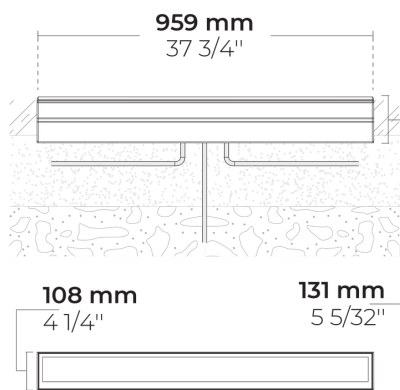

LR9012.584-EN-WW-350-740-SS

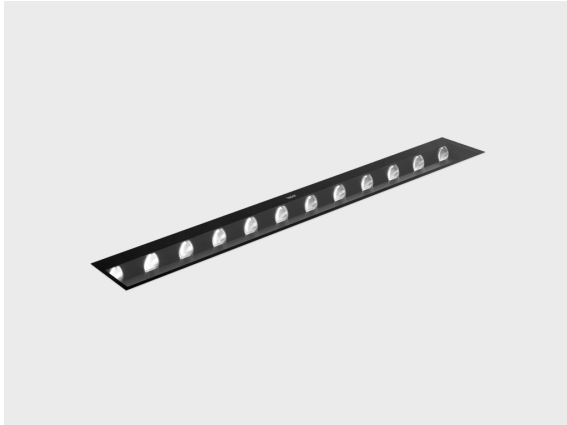

[WW]  
Wall-wash

## Configuration

Light distribution	[WW] 45x85°
Delivered lumens flux	2799 lm
Rated input power	30 W
Color temperature	4000 K CRI 70
Luminaire efficacy	93 lm/W
Lamp	12 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>42,000
Lifetime L80 (hour)	>42,000

## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.88 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheated power cord

Accessories (Included)

Mounting accessories



Aluminium case  
for ZETA 12 Dyno /  
MOLTO 6 Hybrid  
007500402


Accessories (To be ordered separately)

Mounting accessories




Case removing  
vacuum  
160404012

Mounting accessories




Connector set - 5-  
pole  
141407400

Mounting accessories



Junction Box  
141901135

Project name					Type		Quantity	
Date			Note					
LR9012.584-EN-WW-350-740-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[WW]</b> Wall-wash - 45x85°	<b>[350]</b> 30 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[840]</b> 4000 K CRI 80	<b>[DALI]</b> DALI	
<b>Accessories</b> <i>(Included)</i>	<b>Accessories (To be ordered separately)</b>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[007500402]</b> Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	<b>[160404012]</b> Case removing vacuum <b>[141407400]</b> Connector set - 5-pole <b>[141901135]</b> Junction Box			