

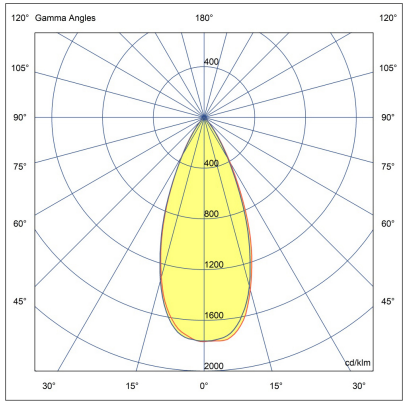


# VEGA S W

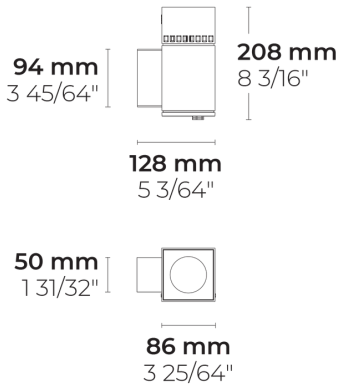

LW8020.693-EN-MN-700-827

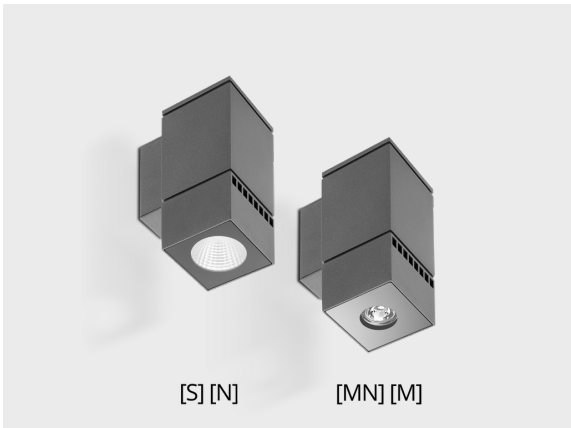

[MN]

Medium narrow -  
NEMA Type 3

## Configuration

Light distribution	[MN] 42°
Delivered lumens flux	686 lm
Rated input power	10 W
Color temperature	2700 K CRI 80
Luminaire efficacy	68 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options

## Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.14 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord

## Accessories (To be ordered separately)

---

### Optical accessories










#### Visor for VEGA S

100708016

Project name				Type		Quantity	
Date		Note					

**LW8020.693-EN-MN-700-827-\_\_-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[MN]</b> Medium narrow - NEMA Type 3 - 42°  <b>[S]</b> Spot - NEMA Type 0 - 7°  <b>[N]</b> Narrow - NEMA Type 2 - 26°  <b>[M]</b> Medium - NEMA Type 4 - 60°	<b>[700]</b> 10 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[DALI]</b> DALI	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Consult the factory</b>	<b>Optical accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100708016]</b> Visor for VEGA S			
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				