


NORMA L

LB6056.510-US

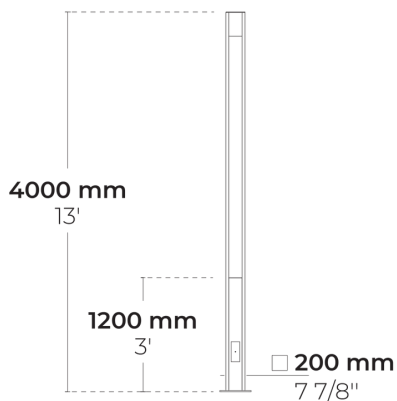

[SYM-4L]

Symmetric, Special
effect: 4 lines - 120°

Configurations

Light distribution	[SYM-4L] 120°
Delivered lumens flux	2231 - 3653 lm
Rated input power	36 - 56 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B1-U0-G1
Lifetime L90 (hour)	>72, 600
Lifetime L80 (hour)	>72, 600

Options

Control	On/Off, 0-10V
Product colors	

Extras


Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	73.8 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)


Anchor bolts Bolt covers



90CJ004

90CJ004

Bolt covers










C3F2C.T001

C3F2C.T001

Project name		Type		Quantity	
Date		Note			

LB6056.510-US-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM-4L] Symmetric, Special effect: 4 lines - 120°	[700] 36 W [1050] 56 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Luminaire body options	Anchor bolts			
	[90CJ004] 90CJ004			
	Bolt covers			
	[C3F2C.T001] C3F2C.T001			
[DPC] Double powder coating				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LB6056.510-US-SYM-4L-1050-740	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	3653 lm	56 W	4000 K CRI 70	On/Off, 0-10V
LB6056.510-US-SYM-4L-1050-827	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2874 lm	56 W	2700 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-1050-830	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2970 lm	56 W	3000 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-1050-840	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	3273 lm	56 W	4000 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-740	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2800 lm	36 W	4000 K CRI 70	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-827	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2231 lm	36 W	2700 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-830	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2256 lm	36 W	3000 K CRI 80	On/Off, 0-10V
LB6056.510-US-SYM-4L-700-840	[SYM-4L] Symmetric, Special effect: 4 lines - 120°	2531 lm	36 W	4000 K CRI 80	On/Off, 0-10V