


PRIFMA W AFX 1 Module



LW2042.861-US-P4-500-840

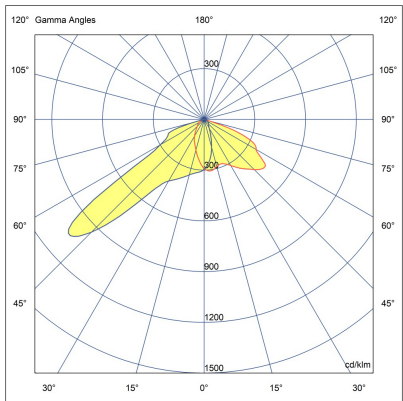

[P4]

Pedestrian crosswalk
distribution

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [P4] 20x78° |
| Delivered lumens flux | 2915 lm |
| Rated input power | 25 W |
| Color temperature | 4000 K CRI 80 |
| Luminaire efficacy | 116 lm/W |
| Lamp | 16 LED |
| Color Deviation | 4 SDCM |
| BUG rating | B1-U0-G1 |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Wall mountable |
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 9.46 lbs |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/4 kV |
| Power factor | > 0.96 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |
| Notes | 3000K CCT or warmer must be selected to be DarkSky International certified. |

| | | | | | | | | |
|-----------------------------------|--|------|--|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | Note | | | | | | |
| LW2042.861-US-P4-500-840-__-__-__ | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|----------------------|-------------------------------|--------------------------|---|
| [P4] Pedestrian crosswalk distribution - 20x78° [T1] Type I - 111x48° [T2] Type II - 133x48° [T2] Type II - 149x54° [T3] Type III - 143x63° [T4] Type IV - 117x64° [T5] Type V - 117° | [500] 25 W | [840] 4000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |
| | [350] 18 W | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray |
| | [700] 35 W | [830] 3000 K CRI 80 | | [HM3] Anthracite gray |
| | | [740] 4000 K CRI 70 | | [HM4] Light gray |
| | | | | [HM5] White |
| | | | | [HM6] Bronze |
| | | | | [CC] Custom color (Please specify RAL code) |
| Extras | | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |