
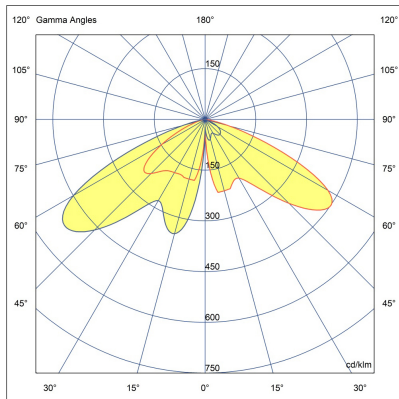


LB6053.509-US-SYM-3L-1050-740-UNI-C1

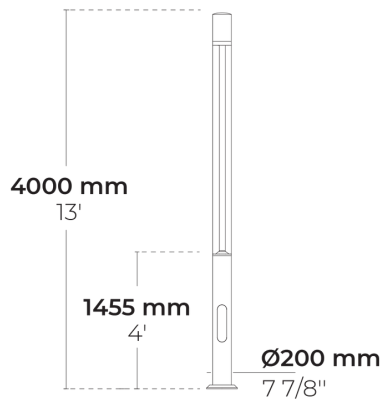

[SYM-3L]

Symmetric, Special  
effect: 3 lines

## Variant

Light distribution	[SYM-3L] 38x117°
Delivered lumens flux	2600 lm
Rated input power	42 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	65 lm/W
Lamp	3 LED
MacAdam Ellipse	4 SDCM
BUG rating	B1-U0-G1
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600


## Options

## Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	89.5 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C


# Accessories (To be ordered separately)

## Anchorage










90CJ003  
90CJ003

## Flange covers



C1J2K  
C1J2K

Project name		Type		Quantity	
Date		Note			
LB6053.509-US-SYM-3L-1050-740-__-UNI-C1-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	[1050] 42 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black 
	[700] 29 W	[827] 2700 K CRI 80  [830] 3000 K CRI 80  [840] 4000 K CRI 80	[0-10V] 0-10V	[HM2] Dark grey   [HM3] Anthracite grey   [HM4] Light grey   [HM5] White   [HM6] Bronze   [CC]  Custom colour (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Luminaire body options	Anchorage			
	[90CJ003] 90CJ003			
[DPC] Double powder coating	Flange covers			
	[C1J2K] C1J2K			