



# DOMINI AFX MIDI 1 Module



IK08 IP66



LB6047.871-EN-T1-350-840-ONOFF-EN-C1

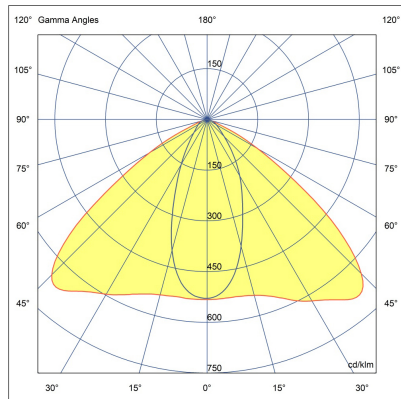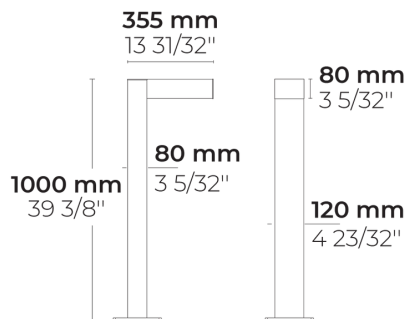

[T1]

Type I, Asymmetric,  
Side throw

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T1] 110x45°  |
| Delivered lumens flux  | 1013 lm       |
| Rated input power      | 10 W          |
| Colour temperature     | 4000 K CRI 80 |
| Luminaire efficacy     | 112 lm/W      |
| Lamp                   | 8 LED         |
| MacAdam Ellipse        | 4 SDCM        |
| BUG rating             | B1-U0-G0      |
| Lifetime L90B50 (hour) | >102,000      |
| Lifetime L80B50 (hour) | >102,000      |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Surface mountable   |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing                |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating   |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | PMMA lens with high optical efficiency                                      |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP66  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 5.7 kg  |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 6/6 kV  |
| Power factor            | > 0.95  |
| Through wiring          | Single cable entry  |
| Operating temperature   | -40...50°C  |
| Cable                   | 0.5 m of flexible cable   |
| Notes                   | 3000K CCT or warmer must be selected to be DarkSky International certified. |


HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 18.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.


# Accessories (To be ordered separately)

## Anchorage



90AJ001  
90AJ001

## Flange covers



C6A2A  
C6A2A

|  |  |             |  |                 |  |
|--|--|-------------|--|-----------------|--|
| <b>Project name</b>                                    |  | <b>Type</b> |  | <b>Quantity</b> |  |
| <b>Date</b>  |  | <b>Note</b> |  |                 |  |
| <b>LB6047.871-EN-T1-350-840-ONOFF-EN-C1-_-_-_-_-_-</b> |  |             |  |                 |  |

| Light distribution  | Rated input power                        | Colour temperature                                  | Control                  | Product colours   |
|---|--|---|--------------------------|---|
| <b>[T1]</b><br>Type I, Asymmetric,<br>Side throw - 110x45°        | <b>[350]</b><br>10 W                     | <b>[840]</b><br>4000 K CRI 80                       | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b><br>Black                                     |
| <b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 134x52°       | <b>[500]</b><br>13.5 W                   | <b>[827]</b><br>2700 K CRI 80                       |                          | <b>[HM2]</b><br>Dark grey                                 |
| <b>[T3]</b><br>Type III, Asymmetric,<br>Side throw - 131x60°      | <b>[700]</b><br>18 W                     | <b>[830]</b><br>3000 K CRI 80                       |                          | <b>[HM3]</b><br>Anthracite grey                           |
| <b>[T4]</b><br>Type IV, Asymmetric,<br>Forward throw -<br>114x65° | <b>[700]</b><br>20 W                     | <b>[740]</b><br>4000 K CRI 70                       |                          | <b>[HM4]</b><br>Light grey                                |
| <b>[T5]</b><br>Type V, Symmetric -<br>115°                        |  |   |                          | <b>[HM5]</b><br>White                                     |
|   |  |   |                          | <b>[HM6]</b><br>Bronze                                    |
|   |  |   |                          | <b>[CC]</b><br>Custom colour (Please<br>specify RAL code) |
| Height  | Extras                                   | Accessories ( <i>To be<br/>ordered separately</i> ) |                          |   |
| <b>[H1]</b><br>1m   | <b>Light output</b>                      | <b>Anchorage</b>                                    |                          |   |
| <b>[HC]</b>   | <b>[BS]</b><br>Backlight Shield          | <b>[90AJ001]</b><br>90AJ001                         |                          |   |
|   | <b>Consult the factory</b>               | <b>Flange covers</b>                                |                          |   |
|   | <b>[UNI]</b><br>120-277V 50/60Hz         | <b>[C6A2A]</b><br>C6A2A                             |                          |   |
|   | <b>Luminaire body<br/>options</b>        |   |                          |   |
|   | <b>[DPC]</b><br>Double powder<br>coating |   |                          |   |