



# DOMINI AFX MIDI 1 Module Duo



IK08 IP66



LB6047.872-EN-T4-700-827-ONOFF-EN-C1

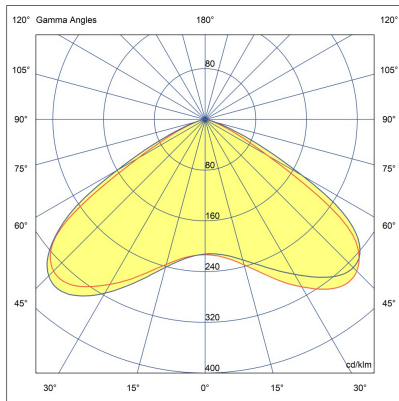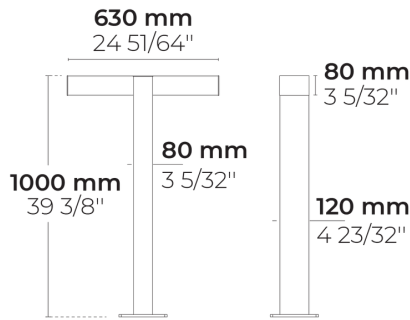

[T4]

Type IV, Asymmetric,  
Forward throw

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T4] 114x65°  |
| Delivered lumens flux  | 3615 lm       |
| Rated input power      | 37 W          |
| Colour temperature     | 2700 K CRI 80 |
| Luminaire efficacy     | 100 lm/W      |
| Lamp                   | 16 LED        |
| MacAdam Ellipse        | 3 SDCM        |
| BUG rating             | B0-U0-G0      |
| Lifetime L90B50 (hour) | >102,000      |
| Lifetime L80B50 (hour) | >102,000      |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Surface mountable   |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing                |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating   |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | PMMA lens with high optical efficiency                                      |
| Glass / Diffuser        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP66  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 7.43 kg   |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 6/6 kV  |
| Power factor            | > 0.95  |
| Through wiring          | Single cable entry  |
| Operating temperature   | -40...50°C  |
| Cable                   | 0.5 m of flexible cable   |
| Notes                   | 3000K CCT or warmer must be selected to be DarkSky International certified. |

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)

## Anchorage










90AJ001  
90AJ001

## Flange covers



C6A2A  
C6A2A

|   |  |      |  |          |  |
|---|--|------|--|----------|--|
| Project name  |  | Type |  | Quantity |  |
| Date  |  | Note |  |          |  |
| LB6047.872-EN-T4-700-827-ONOFF-EN-C1-__-__-__-__-__ |  |      |  |          |  |

| Light distribution   | Rated input power                     | Colour temperature   | Control  | Product colours   |   |
|--|---------------------------------------|--|--|---|---|
| <b>[T4]</b><br>Type IV, Asymmetric,<br>Forward throw - 114x65°   | <b>[700]</b><br>37 W                  | <b>[827]</b><br>2700 K CRI 80                                      | <b>[ONOFF]</b><br>On/Off                               | <b>[HM1]</b><br>Black   |  |
| <b>[T1]</b><br>Type I, Asymmetric,<br>Side throw - 110x45°<br><br><b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 134x52°<br><br><b>[T3]</b><br>Type III, Asymmetric,<br>Side throw - 131x60°<br><br><b>[T5]</b><br>Type V, Symmetric - 115° | <b>[500]</b><br>27 W                  | <b>[830]</b><br>3000 K CRI 80                                      |  | <b>[HM2]</b><br>Dark grey   |  |
|  | <b>[350]</b><br>20 W                  | <b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 |  | <b>[HM3]</b><br>Anthracite grey   |  |
|  |                                       |  |  | <b>[HM4]</b><br>Light grey  |  |
|  |                                       |  |  | <b>[HM5]</b><br>White   |  |
|  |                                       |  |  | <b>[HM6]</b><br>Bronze  |  |
|  |                                       |  | <b>[CC]</b><br>Custom colour (Please specify RAL code) |  |   |
| <b>Height</b>  | <b>Extras</b>                         | <b>Accessories (<i>To be ordered separately</i>)</b>               |  |   |   |
| <b>[H1]</b><br>1m<br><br><b>[HC]</b>   | <b>Light output</b>                   | <b>Anchorage</b>   |  |   |   |
|  | <b>[BS]</b><br>Backlight Shield       | <b>[90AJ001]</b><br>90AJ001  |  |   |   |
|  | <b>Consult the factory</b>            | <b>Flange covers</b>   |  |   |   |
|  | <b>[UNI]</b><br>120-277V 50/60Hz      | <b>[C6A2A]</b><br>C6A2A  |  |   |   |
|  | <b>Luminaire body options</b>         |  |  |   |   |
|  | <b>[DPC]</b><br>Double powder coating |  |  |   |   |