



RHINO Floodlight

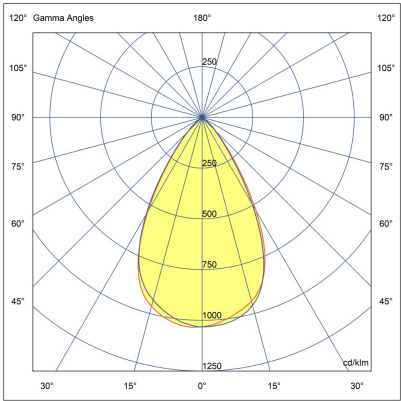

LL2028.694-US-M-700-830

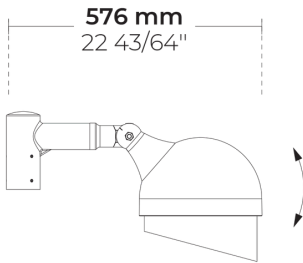

[M]

Medium - NEMA
Type 4

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [M] 60° |
| Delivered lumens flux | 1788 lm |
| Rated input power | 27 W |
| Color temperature | 3000 K CRI 80 |
| Luminaire efficacy | 69 lm/W |
| Lamp | 3 LED |
| Color Deviation | 5 SDCM |
| Lifetime L90 (hour) | >72,600 |
| Lifetime L80 (hour) | >72,600 |

Options

Technical information

| | |
|-----------------------------|--|
| Mounting | Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4" |
| Tilt angle | +70°/-30° |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Wind catching area (EPA) | 0.66 ft² |
| Weight | 15.7 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |
| Notes | LED modules and all electrical components have IP66 protection class. |

Poles (To be ordered separately)

Round tapered aluminum poles with base plate

|  | Product code | Height | Diameter / Dimensions | Spigot / End diameter |
|---|--------------|----------------------------|-----------------------|-----------------------|
| | PAFK.D114 | 10', 13.1', 16.4' | Ø4 1/2" | Ø2 3/8", Ø3" |
| | PAFK.D122 | 13.1', 16.4', 19.7' | Ø5" | Ø2 3/8", Ø3" |
| | PAFK.D148 | 19.7', 23.0', 26.2' | Ø6" | Ø2 3/8", Ø3" |
| | PAFK.D165 | 19.7', 23.0', 26.2', 29.5' | Ø6 1/2" | Ø3 1/2", Ø3" |
| | PAFK.D180 | 26.2', 29.5', 32.8' | Ø7" | Ø3 1/2", Ø3" |
| | PAFK.D200 | 32.8', 36.1', 39.4' | Ø7 7/8" | Ø3 1/2", Ø3" |

Round tapered aluminum poles (direct burial)

|  | Product code | Height | Diameter / Dimensions | Spigot / End diameter |
|---|--------------|----------------------------|-----------------------|-----------------------|
| | PABK.D114 | 10', 13.1', 16.4' | Ø4 1/2" | Ø2 3/8", Ø3" |
| | PABK.D122 | 13.1', 16.4', 19.7', 23.0' | Ø5" | Ø2 3/8", Ø3" |
| | PABK.D148 | 19.7', 23.0', 26.2' | Ø6" | Ø2 3/8", Ø3" |
| | PABK.D165 | 19.7', 23.0', 26.2', 29.5' | Ø6 1/2" | Ø3 1/2", Ø3" |
| | PABK.D180 | 26.2', 29.5', 32.8' | Ø7" | Ø3 1/2", Ø3" |
| | PABK.D200 | 32.8', 36.1', 39.4' | Ø7 7/8" | Ø3 1/2", Ø3" |

Round cylindrical aluminum poles with base plate

|  | Product code | Height | Diameter / Dimensions | Spigot / End diameter |
|---|--------------|----------------------------|-----------------------|-----------------------|
| | PAFC.D114 | 10', 13.1', 16.4' | Ø4 1/2" | Ø4 1/2" |
| | PAFC.D122 | 10', 13.1', 16.4', 19.7' | Ø5" | Ø4 51/64" |
| | PAFC.D148 | 19.7', 23.0', 26.2' | Ø6" | Ø5 7/8" |
| | PAFC.D165 | 19.7', 23.0', 26.2', 29.5' | Ø6 1/2" | Ø6 1/2" |

| | | | | | | | |
|---|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LL2028.694-US-M-700-830-__-__-__-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|----------------------|-------------------------------|--------------------------|---|
| [M] Medium - NEMA Type 4 - 60° | [700] 27 W | [830] 3000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |
| [S] Spot - NEMA Type 0 - 7° | [500] 19 W | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray |
| [N] Narrow - NEMA Type 2 - 26° | [350] 14 W | [740] 4000 K CRI 70 | | [HM3] Anthracite gray |
| [MN] Medium narrow - NEMA Type 3 - 42° | | [840] 4000 K CRI 80 | | [HM4] Light gray |
| | | | | [HM5] White |
| | | | | [HM6] Bronze |
| | | | | [CC] Custom color (Please specify RAL code) |
| Extras | | | | |
| External surge protection | | | | |
| [SP10] 10 kV | | | | |
| Mounting options | | | | |
| [DMBA] Double side-mount bracket | | | | |
| [SMBA] Side-mount bracket allowing +/-45° rotation | | | | |
| [TMBA] Top-mount bracket | | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |