



PUNTO L



LF8019.698-US-MN-700-827

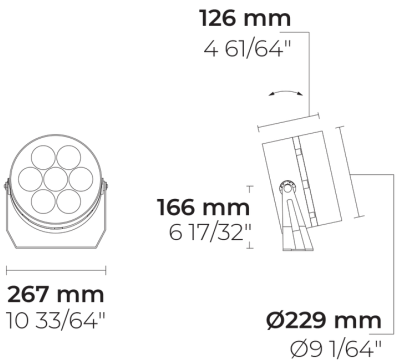

[MN]
Medium narrow -
NEMA Type 3

Configuration

Light distribution	[MN] 42°
Delivered lumens flux	4716 lm
Rated input power	60 W
Color temperature	2700 K CRI 80
Luminaire efficacy	81 lm/W
Lamp	7 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


Options

Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.33 ft²
Weight	14.4 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

Optical accessories



Snoot for PUNTO L

007502177

Mounting accessories



Spike

160405040

Project name				Type		Quantity	
Date		Note					

LF8019.698-US-MN-700-827-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[MN] Medium narrow - NEMA Type 3 - 42°</div> <div>[S] Spot - NEMA Type 0 - 7°</div> <div>[N] Narrow - NEMA Type 2 - 26°</div> <div>[M] Medium - NEMA Type 4 - 60°</div>	<div>[700] 60 W</div>	<div>[827] 2700 K CRI 80</div> <div>[830] 3000 K CRI 80</div> <div>[740] 4000 K CRI 70</div> <div>[840] 4000 K CRI 80</div>	<div>[ONOFF] On/Off</div> <div>[0-10V] 0-10V</div>	<div>[HM1] Black</div> <div>[HM2] Dark gray</div> <div>[HM3] Anthracite gray</div> <div>[HM4] Light gray</div> <div>[HM5] White</div> <div>[HM6] Bronze</div> <div>[CC] Custom color (Please specify RAL code)</div>
Extras	Accessories (<i>To be ordered separately</i>)			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502177] Snoot for PUNTO L			
	Mounting accessories			
	[160405040] Spike			