

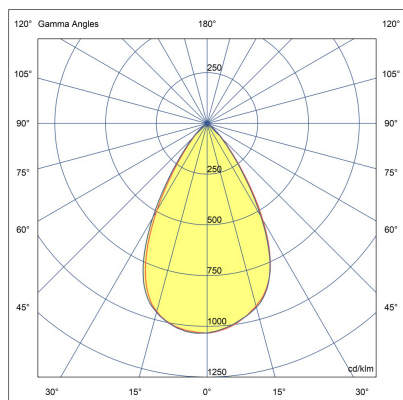


VEGA S W Duo

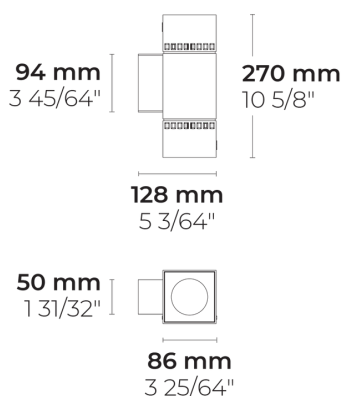

LW7037.519-EN-M-M-700-740

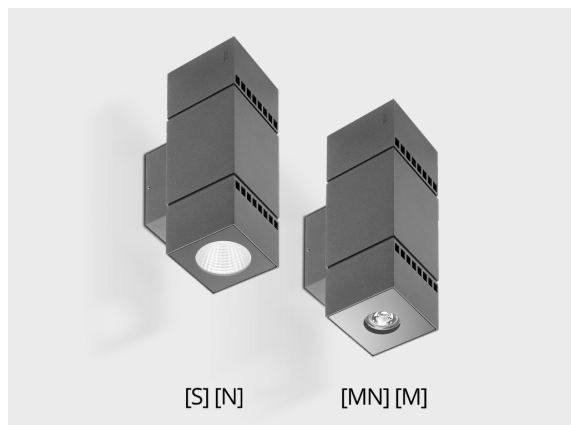

[M-M]
Medium (Up & Down)

Configuration

Light distribution	[M-M] 60°
Delivered lumens flux	1463 lm
Rated input power	18 W
Color temperature	4000 K CRI 70
Luminaire efficacy	73 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord
Notes	Please consult factory for combinations of different beam spreads.

Accessories (To be ordered separately)

Optical accessories










Visor for VEGA S

100708016

Project name				Type		Quantity	
Date		Note					

LW7037.519-EN-M-M-700-740-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[M-M] Medium (Up & Down) - 60° [S-S] Spot - NEMA Type 0 (Up & Down) - 7° [N-N] Narrow - NEMA Type 2 (Up & Down) - 26° [MN-MN] Medium Narrow (Up & Down) - 42°	[700] 18 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[100708016] Visor for VEGA S			
Luminaire body options				
[DPC] Double powder coating				