

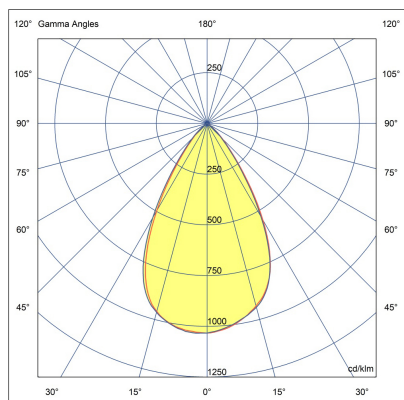


VEGA S W Duo

CE UK CA IK07 IP65

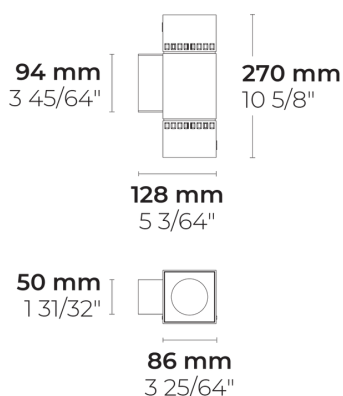

LW7037.519-EN-M-M-700-840-EN-C1

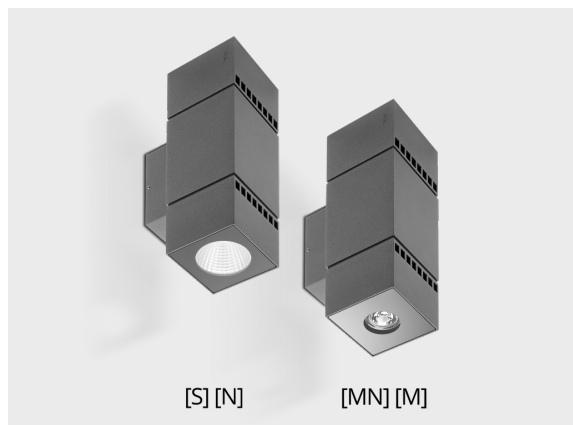

[M-M]

Medium (Up & Down)

Variant

Light distribution	[M-M] 60°
Delivered lumens flux	1368 lm
Rated input power	18 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	68 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600


Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Notes	Please consult factory for combinations of different light distributions.

Accessories (To be ordered separately)








Optical accessories



Visor for VEGA S

100708016

Project name		Type		Quantity	
Date		Note			
LW7037.519-EN-M-M-700-840-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[M-M] Medium (Up & Down) - 60° [S-S] Spot (Up & Down) - 7° [N-N] Narrow (Up & Down) - 26° [MN-MN] Medium Narrow (Up & Down) - 42°	[700] 18 W	[840] 4000 K CRI 80 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[100708016] Visor for VEGA S			
Luminaire body options				
[DPC] Double powder coating				