



# URBAN UNITS V3 Top Module, 360°, 3 Module

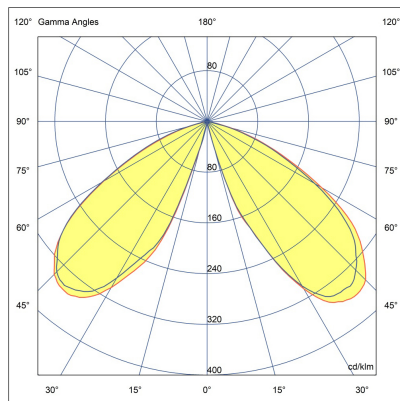

LP4054.846-EN-SYM-1050-840

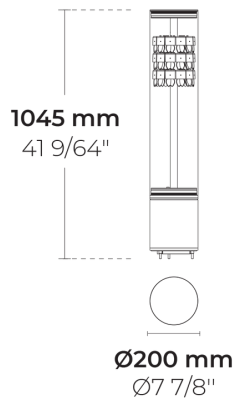

[SYM]  
Symmetric

## Configuration

Light distribution	[SYM] 118°
Delivered lumens flux	6825 lm
Rated input power	78 W
Color temperature	4000 K CRI 80
Luminaire efficacy	87 lm/W
Lamp	36 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

## Options

## Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	15.2 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.93
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord

# Poles (Included)








---

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø 7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø 7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø 7 7/8"	

Project name				Type		Quantity	
Date		Note					
LP4054.846-EN-SYM-1050-840-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM]</b> Symmetric - 118°	<b>[1050]</b> 78 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b>  Dark gray
		<b>[830]</b> 3000 K CRI 80		<b>[HM3]</b>  Anthracite gray
		<b>[740]</b> 4000 K CRI 70		<b>[HM4]</b>  Light gray
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
Extras				
Consult the factory				
<b>[UNI]</b> 120-277V 50/60Hz				
Luminaire body options				
<b>[DPC]</b> Double powder coating				