
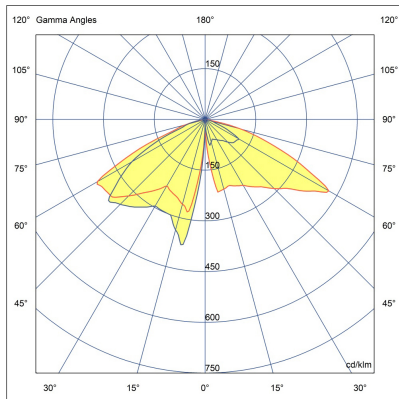


LB6052.509-EN-SYM-3L-350-827-EN-C1

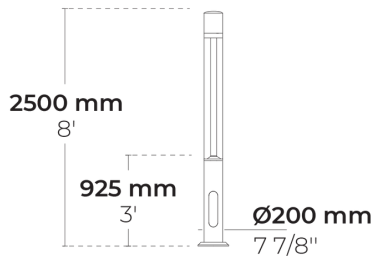

[SYM-3L]

Symmetric, Special  
effect: 3 lines

## Variant

Light distribution	[SYM-3L] 38x117°
Delivered lumens flux	872 lm
Rated input power	15 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	62 lm/W
Lamp	3 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600


## Options

## Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	30.8 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C


# Accessories (To be ordered separately)

## Anchorage










90CJ001  
90CJ001

## Flange covers



C1J2K  
C1J2K

Project name		Type		Quantity	
Date		Note			
LB6052.509-EN-SYM-3L-350-827-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	[350] 15 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black 
	[700] 29 W	[830] 3000 K CRI 80	[DALI] DALI	[HM2] Dark grey 
		[740] 4000 K CRI 70	[AUTO] AutoDIM	[HM3] Anthracite grey 
		[840] 4000 K CRI 80	[STEP] StepDIM	[HM4] Light grey 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom colour (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Anchorages			
[UNI] 120-277V 50/60Hz	[90CJ001] 90CJ001			
Luminaire body options	Flange covers			
[DPC] Double powder coating	[C1J2K] C1J2K			