
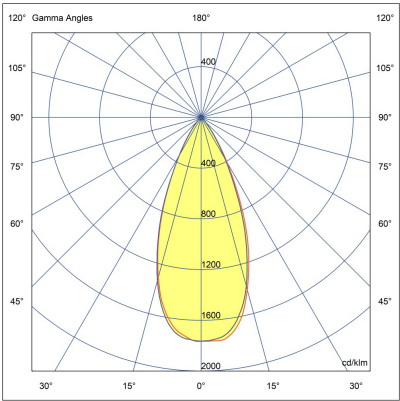


LF8021.695-US-MN-700-740

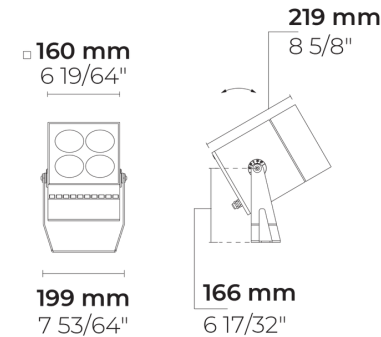

[MN]

Medium narrow -  
NEMA Type 3

### Configuration

Light distribution	[MN] 42°
Delivered lumens flux	3140 lm
Rated input power	35 W
Color temperature	4000 K CRI 70
Luminaire efficacy	91 lm/W
Lamp	4 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

### Options


### Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.40 ft <sup>2</sup>
Weight	14.3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	16" of flexible power cord

# Accessories (To be ordered separately)

---

Optical accessories



Visor for VEGA

100708017

Mounting accessories










Spike

160405040

Project name				Type		Quantity	
Date		Note					

**LF8021.695-US-MN-700-740-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[MN]</b> Medium narrow - NEMA Type 3 - 42°  <b>[S]</b> Spot - NEMA Type 0 - 7°  <b>[N]</b> Narrow - NEMA Type 2 - 26°  <b>[M]</b> Medium - NEMA Type 4 - 60°	<b>[700]</b> 35 W	<b>[740]</b> 4000 K CRI 70  <b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[0-10V]</b> 0-10V	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Luminaire body options</b>	<b>Optical accessories</b>			
<b>[DPC]</b> Double powder coating	<b>[100708017]</b> Visor for VEGA			
	<b>Mounting accessories</b>			
	<b>[160405040]</b> Spike			