


## LF8021.695-US-M-700-740



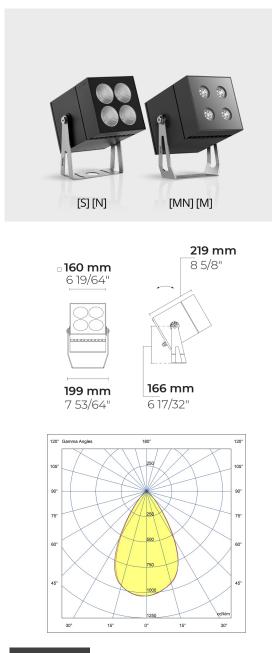

**[M]** Medium - NEMA Type 4

## Configuration

Light distribution	[M] 60°
Delivered lumens flux	2950 lm
Rated input power	35 W
Color temperature	4000 K CRI 70
Luminaire efficacy	73 lm/W
Lamp	4 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

#### Options

### Technical information

Mounting Tilt angle	Yoke mount (standard), stake mount (optional) +60°/-30°
Housing	Corrosion resistant, die-cast, marine grade
nousing	aluminum housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area	0.40 ft²
(EPA)	
Weight	14.3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	10/6 kV
protection	
Power factor	> 0.95
Through wiring	Single power cord entry
Operating	-4050°C
temperature	
Power cord	16" of flexible power cord

# Accessories (To be ordered separately)



Visor for VEGA 100708017

**Spike** 160405040

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 18.05.2024. For current version visit heperlighting.com. All flux ( $\pm$ %7 tolerance) and power values ( $\pm$ %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me			Туре	Quantity	
Date			Note			
LF8021.	695-US-M	-700-740				

Light distribution	Rated input power	Color temperature	Control	Product colors
[ <b>M]</b> Medium - NEMA Type	<b>[700]</b> 35 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	[HM1] Black
4 - 60° <b>[S]</b> Spot - NEMA Type 0 -		<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	[HM2] Dark gray
7° [N]		<b>[830]</b> 3000 K CRI 80		[HM3] Anthracite gray
Narrow - NEMA Type 2 - 26°		<b>[840]</b> 4000 K CRI 80		[HM4] Light gray
<b>[MN]</b> Medium narrow - NEMA Type 3 - 42°				<b>[HM5]</b> White
				[HM6] Bronze
				[CC] Sustom color (Pleas specify RAL code)
Extras	Accessories (To be ordered separately)			
Luminaire body options	Optical accessories	_		
[DPC] Double powder coating	[ <b>100708017]</b> Visor for VEGA			
	Mounting accessories			
	<b>[160405040]</b> Spike			