




MOLTO 2 Hybrid



LR9012.690-EN-S-700-740-SS

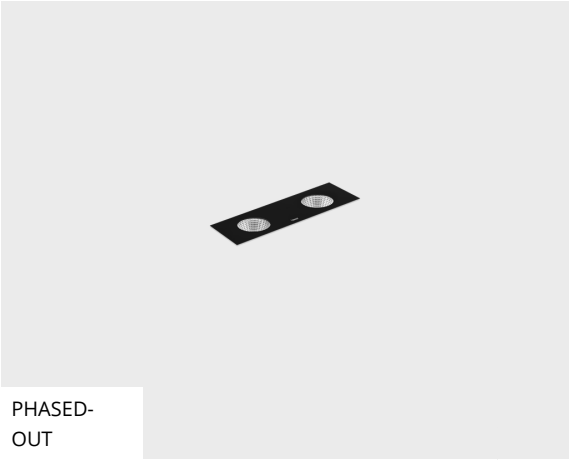

PHASED-
OUT

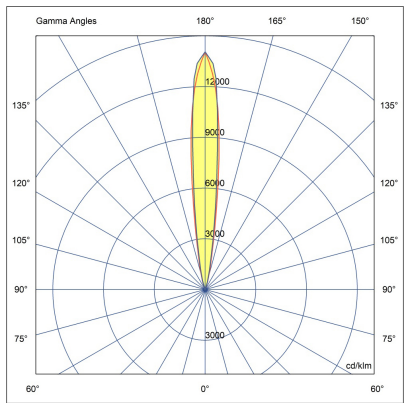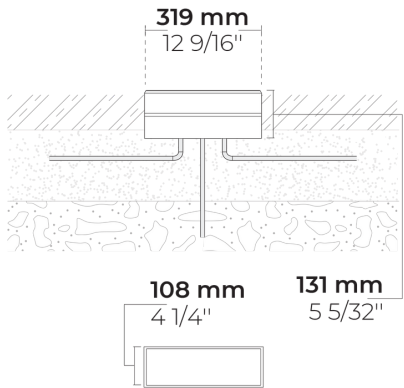

[S]

Spot - NEMA Type 0

Configuration

Light distribution	[S] 7°
Delivered lumens flux	2038 lm
Rated input power	18 W
Color temperature	4000 K CRI 70
Luminaire efficacy	113 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.66 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories



Aluminium case
for ZETA 4 Dyno /
MOLTO 2 Hybrid

007500582

Accessories (To be ordered separately)


Mounting accessories



Case removing
vacuum

160404012


Mounting accessories



Connector set - 5-
pole

141407400

Mounting accessories



Junction Box

141901135

Project name					Type		Quantity	
Date		Note						
LR9012.690-EN-S-700-740-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
[S] Spot - NEMA Type 0 - 7° [N] Narrow - NEMA Type 2 - 26°	[700] 18 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[SS] Stainless steel
Accessories (Included)	Accessories (To be ordered separately)			
Mounting accessories	Mounting accessories			
[007500582] Aluminium case for ZETA 4 Dyno / MOLTO 2 Hybrid	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box			