

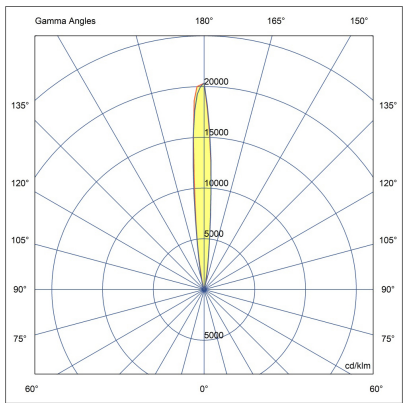


MOLTO 4 Hybrid

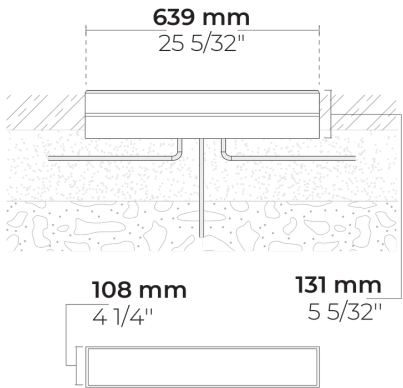

LR9012.695-US-S-700-830-SS

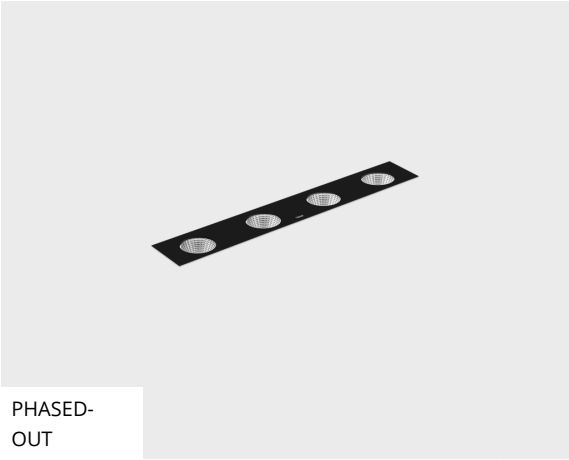

[S]

Spot - NEMA Type 0

Configuration

Light distribution	[S] 7°
Delivered lumens flux	3397 lm
Rated input power	35 W
Color temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	4 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	11.8 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)


Mounting accessories



Aluminium case
for ZETA 8 Dyno /
MOLTO 4 Hybrid

007500618

Mounting accessories



Connector set - 5-
pole

141407400

Accessories (To be ordered separately)


Mounting accessories



Case removing
vacuum

160404012

Project name					Type		Quantity	
Date		Note						
LR9012.695-US-S-700-830-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
[S] Spot - NEMA Type 0 - 7°	[700] 35 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel 
[N] Narrow - NEMA Type 2 - 26°		[827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[0-10V] 0-10V	
Accessories (Included)	Accessories (To be ordered separately)			
Mounting accessories	Mounting accessories			
[007500618] Aluminium case for ZETA 8 Dyno / MOLTO 4 Hybrid [141407400] Connector set - 5-pole	[160404012] Case removing vacuum			