




T-LIGHT ML 4 CB Module



LT2029.651-EN-T-CB-C-700-740

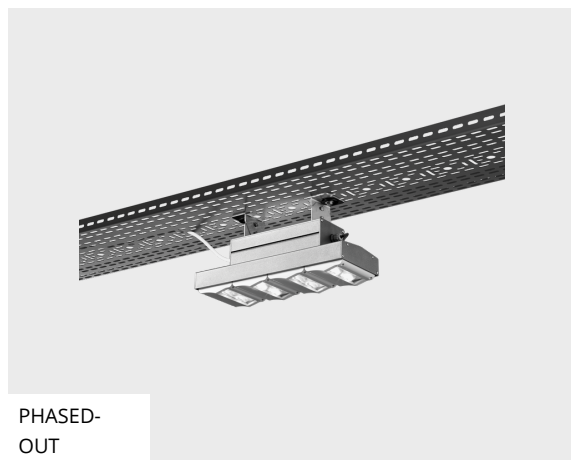

PHASED-
OUT



[T-CB-C]
Tunnel, Counter
beam, Type C

Configuration

Light distribution	[T-CB-C] 130x85°
Delivered lumens flux	7950 lm
Rated input power	70 W
Color temperature	4000 K CRI 70
Luminaire efficacy	114 lm/W
Lamp	8 LED
Color Deviation	3 SDCM
BUG rating	B2-U0-G1
Photobiological safety	Risk group 0
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

Options

Technical information

Mounting	Direct tray mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.64 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name					Type		Quantity	
Date			Note					
LT2029.651-EN-T-CB-C-700-740-__-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[T-CB-C] Tunnel, Counter beam, Type C - 130x85°</div>	<div>[700] 70 W</div>	<div>[740] 4000 K CRI 70</div> <div>[830] 3000 K CRI 80</div>	<div>[ONOFF] On/Off</div> <div>[DALI] DALI</div> <div>[AUTO] AutoDIM</div> <div>[STEP] StepDIM</div>	<div>[HM1] Black</div> <div>[HM2] Dark gray</div> <div>[HM3] Anthracite gray</div> <div>[HM4] Light gray</div> <div>[HM5] White</div> <div>[HM6] Bronze</div> <div>[CC] Custom color (Please specify RAL code)</div>
<div>Extras</div>				
<div>Consult the factory</div>				
<div>[C2] Class II</div>				
<div>[UNI] 120-277V 50/60Hz</div>				
<div>Luminaire body options</div>				
<div>[DPC] Double powder coating</div>				