



VERTEX C 1 Module

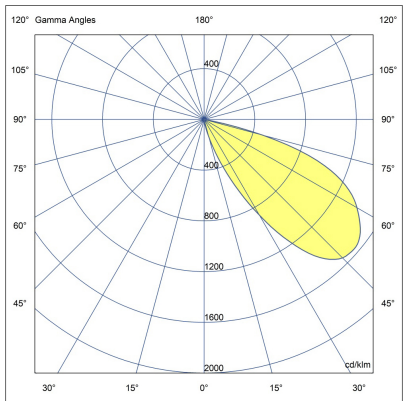

LD6064.591-EN-SLFB-350-822-HM1

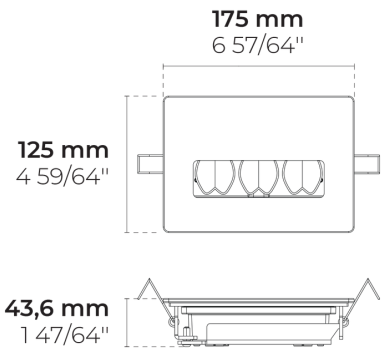

[SLFB]

Special linear,
Forward throw

Configuration

Light distribution	[SLFB] 144x41°
Delivered lumens flux	363 lm
Rated input power	8 W
Color temperature	2200 K CRI 80
Luminaire efficacy	45 lm/W
Lamp	6 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000


Options

Technical information

Mounting	Ceiling mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	18 Vdc (Max) 350 mA
Insulation class	Class I
Weight	0.72 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord

Accessories (To be ordered separately)

Mounting accessories



**DALI & On/Off
driver within an
IP67 box for
VERTEX C**

007502867

Project name					Type		Quantity	
Date			Note					
LD6064.591-EN-SLFB-350-822-__-HM1-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 144x41°	[350] 8 W	[822] 2200 K CRI 80		[HM1] Black
		[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80		
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[C2] Class II [UNI] 120-277V 50/60Hz	[007502867] DALI & On/Off driver within an IP67 box for VERTEX C			