
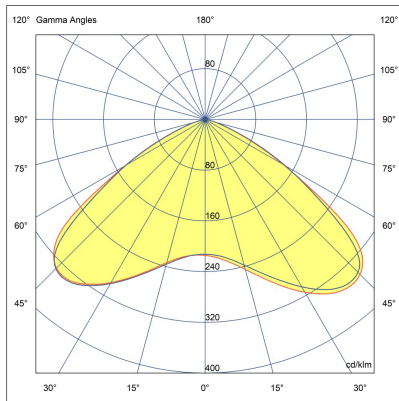


PRIFMA PT AFX 3 Module

CE UK CA IK08 IP66 



LP2046.863-EN-T5-500-740-EN-C1



[T5]

Type V, Symmetric

Variant

Light distribution	[T5] 117°
Delivered lumens flux	10615 lm
Rated input power	72 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	141 lm/W
Lamp	48 LED
MacAdam Ellipse	4 SDCM
BUG rating	B3-U0-G1
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Mounting	Direct pole mounting
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	10.8 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com


We reserve the right to change specifications without prior written notice. Edition: 29.06.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Poles (To be ordered separately)

Cylindrical aluminum poles with flange plate

	Product code	Height	Diameter / Dimensions	Spigot diameter
	PAFC.D114	3m, 4m, 5m m	Ø114mm	Ø114mm mm
	PAFC.D122	3m, 4m, 5m, 6m m	Ø122mm	Ø122mm mm
	PAFC.D148	6m, 7m, 8m m	Ø148mm	Ø148mm mm
	PAFC.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø165mm mm







Conical aluminum poles with embedded base

	Product code	Height	Diameter / Dimensions	Spigot diameter
	PABK.D114	3m, 4m, 5m m	Ø114mm	Ø60mm, Ø76mm mm
	PABK.D122	4m, 5m, 6m, 7m m	Ø122mm	Ø60mm, Ø76mm mm
	PABK.D148	6m, 7m, 8m m	Ø148mm	Ø60mm, Ø76mm mm
	PABK.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø76mm, Ø90mm mm
	PABK.D180	10m, 8m, 9m m	Ø180mm	Ø76mm, Ø90mm mm
	PABK.D200	10m, 11m, 12m m	Ø200mm	Ø76mm, Ø90mm mm

Conical aluminum poles with flange plate

	Product code	Height	Diameter / Dimensions	Spigot diameter
	PAFK.D114	3m, 4m, 5m m	Ø114mm	Ø60mm, Ø76mm mm
	PAFK.D122	4m, 5m, 6m m	Ø122mm	Ø60mm, Ø76mm mm
	PAFK.D148	6m, 7m, 8m m	Ø148mm	Ø60mm, Ø76mm mm
	PAFK.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø76mm, Ø90mm mm
	PAFK.D180	10m, 8m, 9m m	Ø180mm	Ø76mm, Ø90mm mm
	PAFK.D200	10m, 11m, 12m m	Ø200mm	Ø76mm, Ø90mm mm

Project name		Type		Quantity	
Date		Note			
LP2046.863-EN-T5-500-740-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T5] Type V, Symmetric - 117°	[500] 72 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black
[P4] Special pedestrian road distribution-right side traffic - 20x78°	[350] 50 W	[822] 2200 K CRI 80	[DALI] DALI	[HM2]  Dark grey
[T1] Type I, Asymmetric, Side throw - 111x48°	[700] 100 W	[827] 2700 K CRI 80		[HM3]  Anthracite grey
[T2] Type II, Asymmetric, Side throw - 133x48°		[830] 3000 K CRI 80		[HM4]  Light grey
[T2] Type II, Asymmetric, Side throw - 149x54°		[840] 4000 K CRI 80		[HM5]  White
[T3] Type III, Asymmetric, Side throw - 143x63°				[HM6]  Bronze
[T4] Type IV, Asymmetric, Forward throw - 117x64°				[CC]  Custom colour (Please specify RAL code)
Height	Extras			
[H3] 3m	Light output			
[H4] 4m	[AGG] Anti-Glare Glass			
[H5] 5m	[CLO] Constant light output			
[H6] 6m	Consult the factory			
	[C2] Class II			
	[UNI] 120-277V 50/60Hz			