




# GOLEDO-T 192 LED

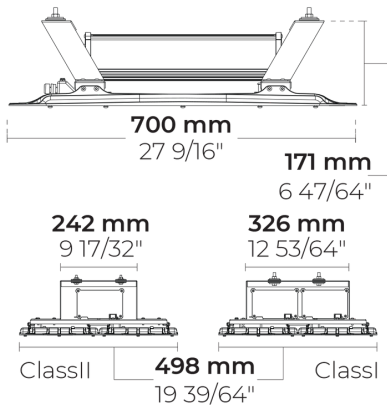

LT2037.887-EN-T-ASYM-C-500-740

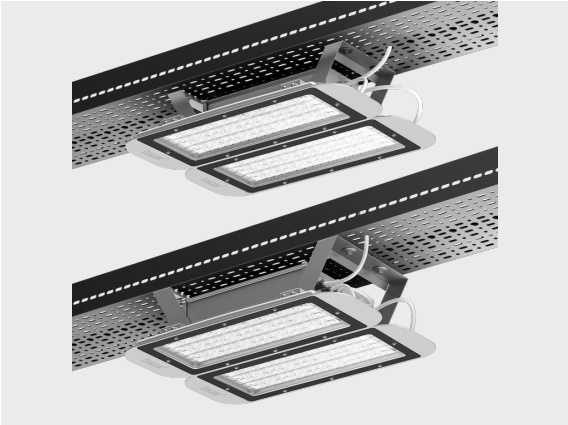

[T-ASYM-C]  
Tunnel, Asymmetric,  
Type C

## Configuration



Light distribution	[T-ASYM-C]
Delivered lumens flux	45980 lm
Rated input power	294 W
Color temperature	4000 K CRI 70
Luminaire efficacy	156 lm/W
Lamp	192 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Mounting	Standard strap connection. Sliding mounting bracket is optional through extra
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	18.75 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

<b>Project name</b>		<b>Type</b>		<b>Quantity</b>	
<b>Date</b>		<b>Note</b>			
<b>LT2037.887-EN-T-ASYM-C-500-740-__-__-__-__-__-__</b>					

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T-ASYM-C]</b> Tunnel, Asymmetric, Type C	<b>[500]</b> 294 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[CC]</b>  Custom color (Please specify RAL code)
<b>[T-ASYM-A]</b> Tunnel, Asymmetric, Type A	<b>[350]</b> 206 W	<b>[730]</b> 3000 K CRI 70	<b>[0-10V]</b> 0-10V	<b>[7035]</b>  Light gray (RAL 7035)
<b>[T-ASYM-B]</b> Tunnel, Asymmetric, Type B	<b>[350]</b> 205 W	<b>[830]</b> 3000 K CRI 80	<b>[DALI]</b> DALI	
<b>[T-ASYM-D]</b> Tunnel, Asymmetric, Type D	<b>[500]</b> 273 W		<b>[AUTO]</b> AutoDIM	
<b>[T-CB-A]</b> Tunnel, Counter beam, Type A	<b>[500]</b> 274 W		<b>[STEP]</b> StepDIM	
<b>[T-CB-B]</b> Tunnel, Counter beam, Type B	<b>[700]</b> 410 W			
<b>[T-CB-B]</b> Tunnel, Counter beam, Type B	<b>[700]</b> 411 W			
<b>[T-CB-B]</b> Tunnel, Counter beam, Type B	<b>[500]</b> 293 W			
<b>[T-CB-B]</b> Tunnel, Counter beam, Type B	<b>[350]</b> 185 W			
<b>[T-SYM-A]</b> Tunnel, Symmetric, Type A	<b>[350]</b> 186 W			
<b>[T-SYM-B]</b> Tunnel, Symmetric, Type B	<b>[700]</b> 412 W			
<b>[T-SYM-C]</b> Tunnel, Symmetric, Type C	<b>[500]</b> 275 W			
<b>[T-SYM-D]</b> Tunnel, Symmetric, Type D				
Extras				

<b>External surge protection</b>
<b>[SP10]</b> 10 kV
<b>Light output</b>
<b>[CLO]</b> Constant light output
<b>Consult the factory</b>
<b>[C2]</b> Class II
<b>[UNI]</b> 120-277V 50/60Hz
<b>Luminaire body options</b>
<b>[DPC]</b> Double powder coating