


# GOLEDO-T 128 LED



LT2037.768-EN-T-CB-B-350-730

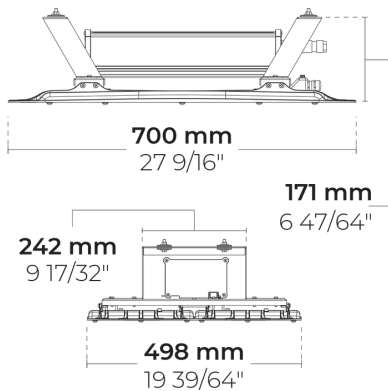

[T-CB-B]

Tunnel, Counter beam, Type B

## Configuration

Light distribution	[T-CB-B]
Delivered lumens flux	19035 lm
Rated input power	123 W
Color temperature	3000 K CRI 70
Luminaire efficacy	154 lm/W
Lamp	128 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Mounting	Standard strap connection. Sliding mounting bracket is optional through extra
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	18.75 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name					Type		Quantity	
Date			Note					
LT2037.768-EN-T-CB-B-350-730-__-__-__-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T-CB-B]</b> Tunnel, Counter beam, Type B	<b>[350]</b> 123 W	<b>[730]</b> 3000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[CC]</b> Custom color (Please specify RAL code)
<b>[T-ASYM-A]</b> Tunnel, Asymmetric, Type A	<b>[700]</b> 274 W	<b>[740]</b> 4000 K CRI 70	<b>[0-10V]</b> 0-10V	<b>[7035]</b> Light gray (RAL 7035)
<b>[T-ASYM-B]</b> Tunnel, Asymmetric, Type B	<b>[700]</b> 273 W		<b>[DALI]</b> DALI	
<b>[T-ASYM-C]</b> Tunnel, Asymmetric, Type C	<b>[500]</b> 187 W		<b>[AUTO]</b> AutoDIM	
<b>[T-ASYM-D]</b> Tunnel, Asymmetric, Type D	<b>[500]</b> 182 W		<b>[STEP]</b> StepDIM	
<b>[T-ASYM-D]</b> Tunnel, Asymmetric, Type D	<b>[500]</b> 189 W			
<b>[T-CB-A]</b> Tunnel, Counter beam, Type A	<b>[500]</b> 186 W			
<b>[T-SYM-A]</b> Tunnel, Symmetric, Type A	<b>[350]</b> 127 W			
<b>[T-SYM-A]</b> Tunnel, Symmetric, Type A	<b>[350]</b> 128 W			
<b>[T-SYM-B]</b> Tunnel, Symmetric, Type B	<b>[350]</b> 124 W			
<b>[T-SYM-B]</b> Tunnel, Symmetric, Type B	<b>[350]</b> 126 W			
<b>[T-SYM-C]</b> Tunnel, Symmetric, Type C	<b>[350]</b> 125 W			
<b>[T-SYM-C]</b> Tunnel, Symmetric, Type C	<b>[500]</b> 184 W			
<b>[T-SYM-D]</b> Tunnel, Symmetric, Type D	<b>[500]</b> 188 W			
<b>[T-SYM-D]</b> Tunnel, Symmetric, Type D	<b>[500]</b> 185 W			
	<b>[500]</b> 63 W			
	<b>[350]</b> 125 W			
Extras				

<b>External surge protection</b>
<b>[SP10]</b> 10 kV
<b>Light output</b>
<b>[CLO]</b> Constant light output
<b>Consult the factory</b>
<b>[C2]</b> Class II
<b>[UNI]</b> 120-277V 50/60Hz
<b>Luminaire body options</b>
<b>[DPC]</b> Double powder coating