



GOLEDO-T 64 LED



LT2037.767-EN-T-ASYM-A-700-740

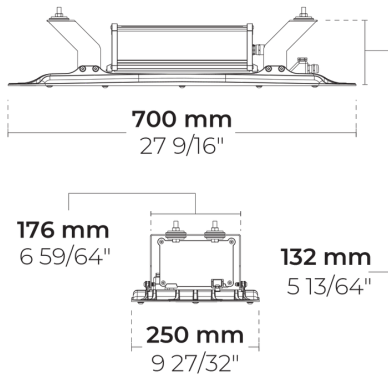

[T-ASYM-A]
Tunnel, Asymmetric,
Type A

Configuration

Light distribution	[T-ASYM-A]
Delivered lumens flux	20555 lm
Rated input power	137 W
Color temperature	4000 K CRI 70
Luminaire efficacy	150 lm/W
Lamp	64 LED
Color Deviation	4 SDCM
BUG rating	B3-U0-G3
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Technical information

Mounting	Standard strap connection. Sliding mounting bracket is optional through extra
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	9.4 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name					Type		Quantity	
Date			Note					

LT2037.767-EN-T-ASYM-A-700-740-_-_-_-_-_-

Light distribution	Rated input power	Color temperature	Control	Product colors
[T-ASYM-A] Tunnel, Asymmetric, Type A	[700] 137 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[CC] Custom color (Please specify RAL code)
[T-ASYM-B] Tunnel, Asymmetric, Type B	[500] 142 W	[730] 3000 K CRI 70	[0-10V] 0-10V	[7035] Light gray (RAL 7035)
[T-ASYM-C] Tunnel, Asymmetric, Type C	[500] 92 W		[DALI] DALI	
[T-ASYM-D] Tunnel, Asymmetric, Type D	[500] 139 W		[AUTO] AutoDIM	
[T-ASYM-D] Tunnel, Asymmetric, Type D	[500] 91 W		[STEP] StepDIM	
[T-CB-A] Tunnel, Counter beam, Type A	[500] 141 W			
[T-CB-B] Tunnel, Counter beam, Type B	[350] 62 W			
[T-CB-B] Tunnel, Counter beam, Type B	[350] 96 W			
[T-SYM-A] Tunnel, Symmetric, Type A	[350] 95 W			
[T-SYM-A] Tunnel, Symmetric, Type A	[500] 138 W			
[T-SYM-B] Tunnel, Symmetric, Type B	[500] 143 W			
[T-SYM-C] Tunnel, Symmetric, Type C	[350] 94 W			
[T-SYM-D] Tunnel, Symmetric, Type D	[350] 97 W			
Extras				

External surge protection
[SP10] 10 kV
Light output
[CLO] Constant light output
Consult the factory
[C2] Class II
[UNI] 120-277V 50/60Hz
Luminaire body options
[DPC] Double powder coating