



WINGS AFX 4 Module

CE UK CA IK08 IP66

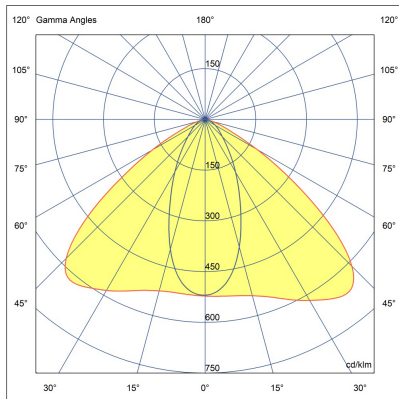

LL2012.864-EN-T1-500-827-ONOFF-EN-C1

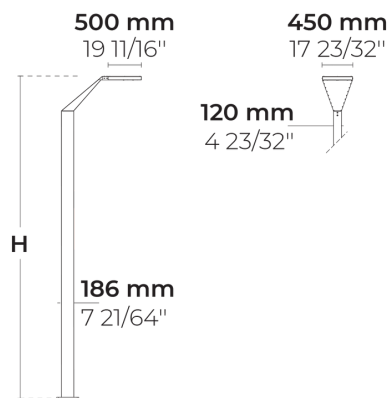

[T1]

Type I, Asymmetric,
Side throw

Variant

Light distribution	[T1] 111x48°
Delivered lumens flux	11555 lm
Rated input power	97 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	115 lm/W
Lamp	64 LED
MacAdam Ellipse	3 SDCM
BUG rating	B3-U1-G1
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	64.04 kg (5 m), 71.67 kg (6 m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Packing box dimensions	45*8*58 cm
Pole detail	

Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 06.05.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.








Poles (Included)

Product specific poles with flange plate

	Variant code	Height	Diameter / Dimensions	Spigot diameter
	PAFD.R01.T002-H5	5m	186*120mm	
	PAFD.R01.T002-H6	6m	186*120mm	

Project name		Type		Quantity	
Date		Note			

LL2012.864-EN-T1-500-827-ONOFF-EN-C1-_-_-_-_-

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T1] Type I, Asymmetric, Side throw - 111x48°	[500] 97 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1]  Black
[P4] Special pedestrian road distribution-right side traffic - 20x78°	[700] 135 W	[830] 3000 K CRI 80		[HM2]  Dark grey
[T2] Type II, Asymmetric, Side throw - 133x48°	[350] 68 W	[740] 4000 K CRI 70		[HM3]  Anthracite grey
[T2] Type II, Asymmetric, Side throw - 149x54°		[840] 4000 K CRI 80		[HM4]  Light grey
[T3] Type III, Asymmetric, Side throw - 143x63°				[HM5]  White
[T4] Type IV, Asymmetric, Forward throw - 117x64°				[HM6]  Bronze
[T5] Type V, Symmetric - 117°				[CC]  Custom colour (Please specify RAL code)
Height	Extras			
[H5] 5m	Consult the factory			
[H6] 6m	[UNI] 120-277V 50/60Hz			
[HC]	Luminaire body options			
	[DPC] Double powder coating			